

# 三久通風乾燥機

SUNCUE VENTILATING DRYER




**SKS-480C** 通風式槍型間接熱風乾燥機  
GUN TYPE (INDIRECT) BURNER




**SKS-480G** 通風式槍型乾燥機  
GUN TYPE (DIRECT) BURNER

乾燥範圍：農產品、食品類、藥草類... 凡需曬乾之物皆適用  
Application: Agricultural products, Foods and medical herbs..etc.



## 尺寸圖 DIMENSION

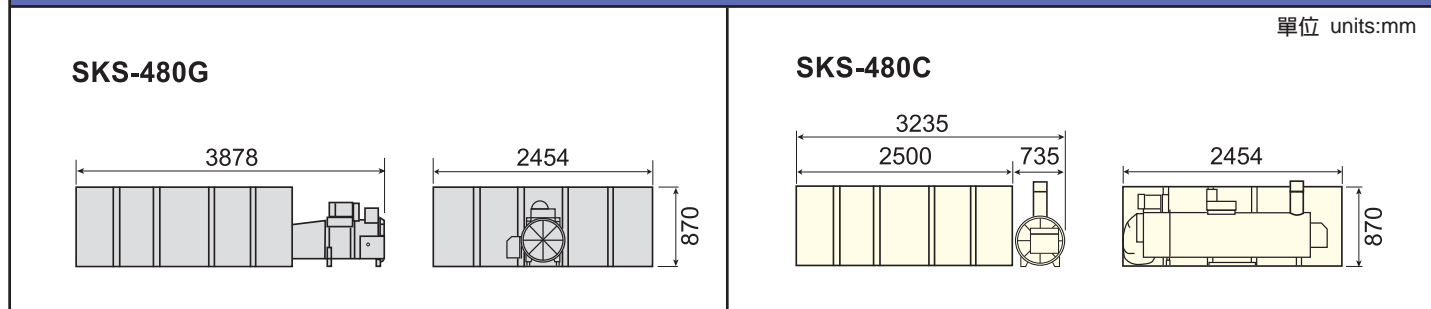

## 性能規格表

機型	最大耗油量	溫度範圍	乾燥物	燃料	安全裝置	使用電壓	所需馬力	長 (mm)	寬 (mm)	高 (mm)	空機重量 (約)	乾燥箱
SKS-480G 低溫型	約 2.9 l/hr	外氣溫 +10~30°C	蒜頭、稻穀、種子	煤油 或 超級柴油	風壓開關 熱動電驛 壓力開關 燃燒機熄火 (電眼) 燃燒機保險絲	220v 380v 440v 50 / 60 Hz 需指定電壓	1HP	3878	2454	870	單層: 455kg 雙層: 540kg	單層: 5.84 sq.m. 2.5m <sup>3</sup>
	約 3.3 l/hr	外氣溫 +10~36°C	稻穀、竹筴、木製品、落花生									雙層: 5.84 sq.m. 6.06m <sup>3</sup>
	約 4.4 l/hr	外氣溫 +10~48°C	小麥、玉米、菠蘿莖、飼料									
SKS-480G 高溫型	約 6.6 l/hr	外氣溫 +10~60°C	小麥、玉米、鹽酥花生、 五香瓜子、龍眼乾、鴨毛、 飼料、鵝毛、可可豆、咖啡豆	煤油								
SKS-480C	約 3.3 l/hr	外氣溫 +10~20°C	凡低溫需清潔之食品乾燥物 皆適用，如藥草、蔥片、 蒜片、豆腐乾	煤油 或 超級柴油	風壓開關 熱動電驛 燃燒機熄火 (電眼) 燃燒機保險絲			3235	2454	870	單層: 480kg 雙層: 565kg	單層: 5.84 sq.m. 2.5m <sup>3</sup> 雙層: 5.84 sq.m. 6.06m <sup>3</sup>

## SPECIFICATIONS

Model	Maximum Fuel Consumption	Hot air temperature	Application	Fuel type	Safety device	Voltage	Horse power	LengthxWidthxHeight (mm)	Net weight (kg) approx.	Drying bin	
SKS-480G Low heat type	Approx. 2.9 L/hr	Ambient temperature +10~30 °C	Garlic bulb, Paddy, Seeds	Kerosene or Premium Diesel	Air pressure switch, Thermo-over relay, Pressure switch, Burner flame sensor, Burner fuse	220V 380V 440V 50/60 Hz Alternative	1HP	3878x2454x870	Single layer: 455	Single layer: 5.84 sq.m. 2.5m <sup>3</sup>	
	Approx. 3.3 L/hr	Ambient temperature +10~36 °C	Paddy, Chopsticks, Wooden products, Peanut							Double layer: 540	Double layer: 5.84 sq.m. 6.06m <sup>3</sup>
	Approx. 4.4 L/hr	Ambient temperature +10~48 °C	Wheat, Corn, Animal feeds								
SKS-480G High heat type	Approx. 6.6 L/hr	Ambient temperature +10~60 °C	Wheat, Corn, Peanut, Pumpkin seeds, Longan, Duck feather, Animal feeds, Goose feather, Cocoa bean, Coffee bean	Kerosene							
SKS-480C	Approx. 3.3 L/hr	Ambient temperature +10~20°C	Agricultural products that need to be dried by low temperature & indirect heat, such as onion, garlic, and herbs.	Kerosene or Premium Diesel	Air pressure switch, Thermo-over relay, Burner flame sensor, Burner fuse			3235x2454x870	Single layer: 480	Single layer: 5.84 sq.m. 2.5m <sup>3</sup> Double layer: 565 Double layer: 5.84 sq.m. 6.06m <sup>3</sup>	

- 規格尺寸顏色如有變更，恕不另行通知
- Specifications and color subject to change without prior notice.

SUNCUE<sup>®</sup>

三久股份有限公司

SUNCUE COMPANY LTD.

霧峰廠 / 台中市霧峰區民生路396號  
 TEL:04-23397171 FAX:04-23302939  
 www.suncue.com E-mail:suncue@ms10.hinet.net

上海廠 / 上海市閔行區華翔路3039號 郵編201107  
 TEL:(021)6221-1839 FAX:(021)6221-1848  
 www.suncue.com

No.396, Minsheng Rd., Wufeng Dist., Taichung City 413, Taiwan (R.O.C.)  
 TEL:+886-4-2339-7171 FAX:+886-4-2330-2939  
 www.suncue.com E-mail:suncue@ms10.hinet.net

Shanghai 3039 Huaxiang Road, Minhang District, Shanghai, 201107 China  
 TEL:+86-21-6221-1839 FAX:+86-21-6221-1848  
 www.suncue.com