

# 三久低温干燥机

SUNCUE Rapeseed Dryer

CPR-165 SERIES

油菜籽专用


干燥成本低  
*Minimum Cost*

恒温干燥  
*Constant Temperature*

耐职业长期使用  
*Durability*



## 尺寸图 Dimensions

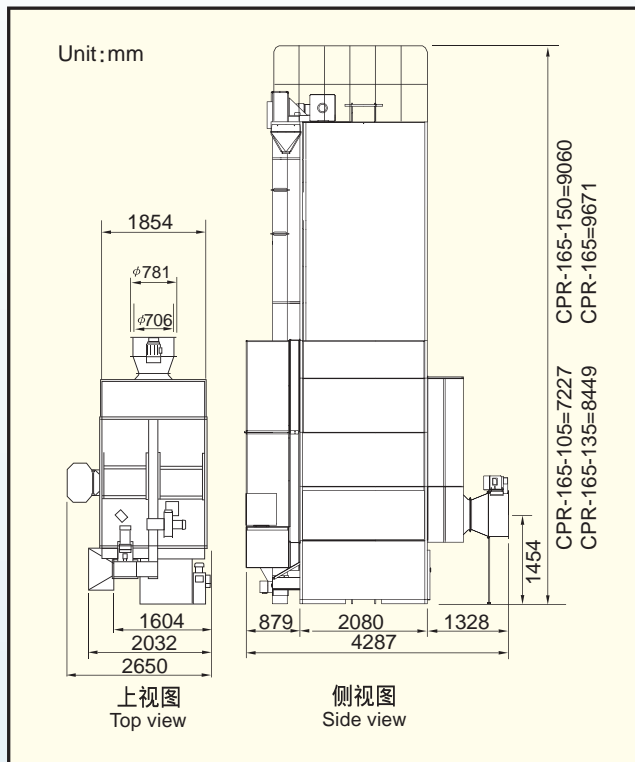

## 特色 Advantages

- 干燥部构造采用特殊设计，达到最均匀的干燥与最佳的干燥效率。  
Drying section adopts particular design to reach even drying and optimum drying efficiency.
- 干燥部容量大，干燥速度快，节省电力，并提高谷物品质。  
Giant drying section, speedy drying, power saving, premium quality of grains.
- 强制分散装置及多支回转阀定量下料循环，让谷物均匀干燥。  
Spreader device and rotary valves control measurable loading capacity in circulating, and make grains with even drying.
- 采用高压喷雾式燃烧机，可完全燃烧、省油，烘出的谷物无油味、不受污染。  
High-pressure automatic ignition burner. Complete combustion, fuel saving, dry grains without soot smell and pollution.
- 超大燃烧室，燃烧量大，提高减干率、质量更好、干燥成本更低。  
Giant combustion chamber, Max. thermal energy, Drying rate increase, better quality and quantity, minimum cost.
- 设置安全性运转监视系统：马达过载保护、控制保险丝、入谷满量警报、风压开关、燃烧机熄火、异常过热、电脑水份计防止过度干燥等安全装置。  
Safety operation monitor system : Motor overload protection, Control fuse, Full loading sensor, air pressure switch, extinction sensor, Over heat sensor, over drying safety device in CS-R.

## 规格表 Specification

●下表所列之减干率为参考数值,实际数值会因外气温度、相对湿度、干燥品种、热风温度及干前、干后含水率而有所差异  
Drying rate list below is for reference only. Actual data will differ by ambient temperature, relative humidity, grain variety, hot air temperature, moisture rate before and after drying.

项目 Item		型式 Model	CPR-165-105	CPR-165-135	CPR-165-150	CPR-165
处理量 (公斤) Capacity (kgs)	油菜籽 Rapeseed(1 liter=690g)		7500~10400	7500~13350	7500~14850	7500~16350
	玉米 Corn (1 liter=690g)					
	小麦 Wheat (1 liter=680g)					
	稻谷 Paddy (1 liter=560g)					
机台尺寸 Dimension	全长 Overall Length (mm)		4287			
	全宽 Overall Width (mm)		2650			
	全高 Overall Height (mm)		7227	8449	9060	9671
空机重量约	Net weight (kg)		2790	2980	3075	3170
燃烧机 Burner	型式 Type		枪型双喷嘴, 高压喷雾燃烧 Gun Type, Double Nozzle, Spray Burner			
	点火方式 Ignition		高压自动点火 Hi-pressure automatic ignition			
	最大燃烧量 Max.thermal energy		高温型:35.5公升/小时 High temperature type : 35.5 liter/ hour 低温型:25公升/小时 Low temperature type : 25 liter/ hour			
使用燃料	Fuel	煤油或符合国家标准的0号至-50号轻柴油 Kerosene or Premium diesel				
所需动力	Power	三相 (3 Phase) 220V/380V/440V , 50Hz/60Hz 6.5kW (8 2/3HP)				
性能 Function	入谷时间 Loading	油菜籽 Rapeseed	约40分 44Min.(approx.)	约50分 50Min.(approx.)	约55分 55Min.(approx.)	约60分 60Min.(approx.)
		稻谷 Paddy	约50分 50Min.(approx.)	约60分 60Min.(approx.)	约66分 66Min.(approx.)	约72分 72Min.(approx.)
	出谷时间 (油菜籽、稻谷) Discharging (Rapeseed Paddy)		约45分 45Min.(approx.)	约55分 55Min.(approx.)	约60分 60Min.(approx.)	约66分 66Min.(approx.)
	减干率(% / 小时) Drying Rate(%/hr)		油菜籽、小麦、稻谷:0.5~1.2(低温型) Rapeseed、Wheat、Paddy:0.5~1.2(Low temperature)		玉米:1.2~2.0(高温型) Corn:1.2~2.0(High temperature)	
安全装置	Safety Devices	热继电器、风压开关、满量警报、定时开关、控制保险丝、燃烧机熄火(电眼)、异常过热 Thermo-over relay, Air pressure switch, Full load buzzer,Timer,Control fuse,Furnace extinction electric eye,Over heat sensor.				

※本规格尺寸及颜色如有变更,恕不另行通知 Specification subject to change without notice.

**SUNCUE**<sup>®</sup>

三久股份有限公司  
SUNCUE COMPANY LTD.

台湾台中市雾峰区民生路396号 邮递区号413  
No.396, Minsheng Rd., Wufeng Dist., Taichung City 413, Taiwan (R.O.C.)  
TEL:+886-4-2339-7171 FAX:+886-4-2330-2939  
www.suncue.com E-mail:suncue@ms10.hinet.net

上海三久机械有限公司  
SHANGHAI SUNCUE MACHINERY CO., LTD.

上海市闵行区华翔路3039号 邮编201107  
3039 Huaxiang Rd, Minhang District, Shanghai, 201107 China  
TEL:+86-21-6221-1839 FAX:+86-21-6221-1848  
www.suncue.com E-mail:suncue.sh@gmail.com

DC091204-CE